



# UNDERCOUNTER FREEZER

MODEL DUC48F  
2-Door



## TECHNICAL SPECIFICATIONS

|                       |                 |
|-----------------------|-----------------|
| Voltage/Frequency     | 115V/60Hz       |
| Refrigerant           | R290            |
| Type of Defrost       | Automatic       |
| Interior Material     | Stainless Steel |
| Exterior Material     | Stainless Steel |
| Temperature Range °F  | 0 ~ -8°F        |
| Compressor Power (HP) | 1/2-            |
| Nema Config.          | NEMA5-15P       |



## PRODUCT FEATURES

-  The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
-  Higher Resistance to dust, high quality condenser.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Self-closing doors at 60° with stay open feature.
-  Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Lifetime warranty on hinges.
-  6" casters with lock for easy mobility.



## HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey



1-800-931-8628

@ [info@dukersusa.com](mailto:info@dukersusa.com)

[www.DukersUSA.com](http://www.DukersUSA.com)

# DETAILS & SPECIFICATIONS

## UNDERCOUNTER DUC48F

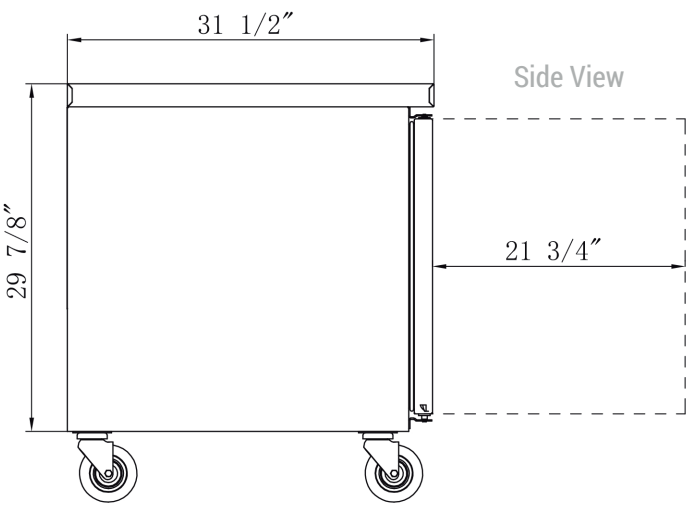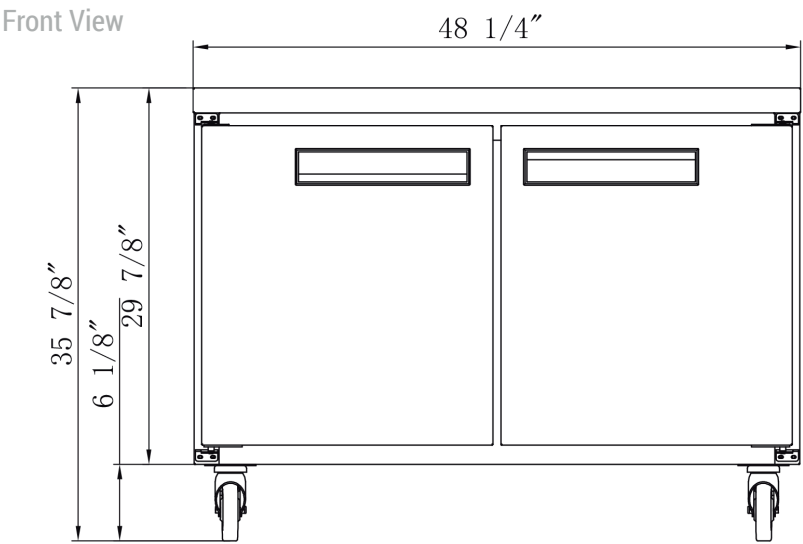

### MODEL DUC48F

|                           |             |
|---------------------------|-------------|
| Rated Voltage             | 115V        |
| Rated Frequency           | 60Hz        |
| Total Input Power         | 660W        |
| Total Current             | 8.0A        |
| Total Capacity            | 12.21 cu ft |
| Climatic Category         | 4-5         |
| Protection Type           | I           |
| Design Pressure High Side | 300 PSIG    |
| Design Pressure Low Side  | 150 PSIG    |
| Insulation Blowing Gas    | C-Pentane   |
| Refrigerant               | R290/3.70oz |

| MODEL  | EXTERNAL DIMENSION<br>WXDXH (INCHES) | PACKAGING DIMENSION<br>WXDXH (INCHES) | PRODUCT NET<br>WEIGHT | # OF<br>SHELVES | 40HQ<br>CONTAINER CERT. |
|--------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| DUC48F | 48 1/4 x 31 1/2 x 36                 | 49 5/8 x 33 1/8 x 39 3/8              | 211 lbs               | 2               | 46                      |



AutoQuotes



115/60/1  
NEMA-5-15P



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com