

Beer Dispenser


Model No.

DD24-1-HC



Features:

- R600 HC refrigerant
- CFC free refrigerant and foam
- Electronic thermostat & digital LED temperature display for accurate control & easy reading (*Located inside Cabinet)
- Self-closing door with locks
- Adjustable heavy duty PVC coated shelves
- Magnetic gasket can be replaced without any tools
- Stainless steel top
- Interior: Stainless steel walls and ceiling, 430 stainless steel bottom
- Exterior: Corrosion resistant vinyl on steel in black
- Internal design accommodates a variety of beer kegs
- Installation board is removable for easy access to condenser coil
- 3" Diameter stainless steel insulated beer column. Designed to channel cold air directly into insulated beer column, thus maximizing your draft beer profits by reduced foaming.
- Ships with casters Pre-Installed

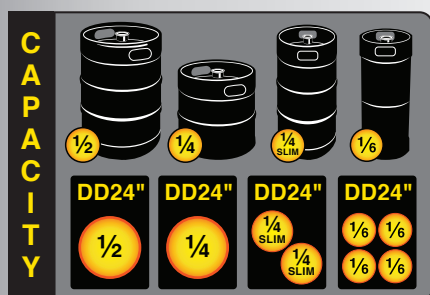

Warranty Info:

Two Year

- Parts & Labor on entire unit.
- Valid in United States.
- Valid for commercial use only.

Three Year

- Additional Compressor, Part Only.



* See last page for more information.



Revised

02/05/2021

DD24-1-HC


Phone: (800).768.5953
Fax: (800).976.1299

www.servware.com
Copyright © 2021 Serv-Ware Products LLC.


DD24-1-HC Beer Dispenser




Item # _____
Project : _____
Qty : _____

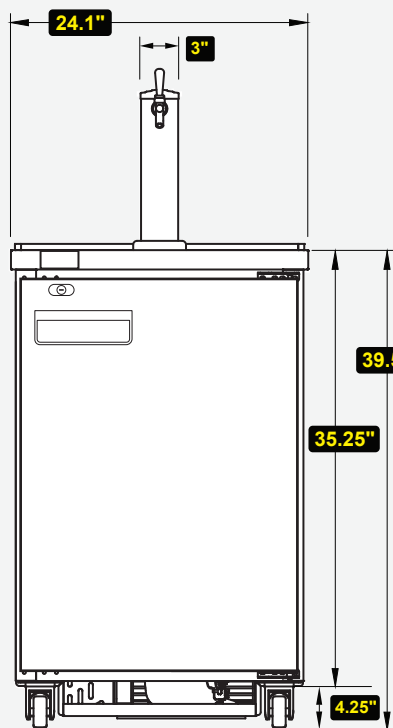

Front View

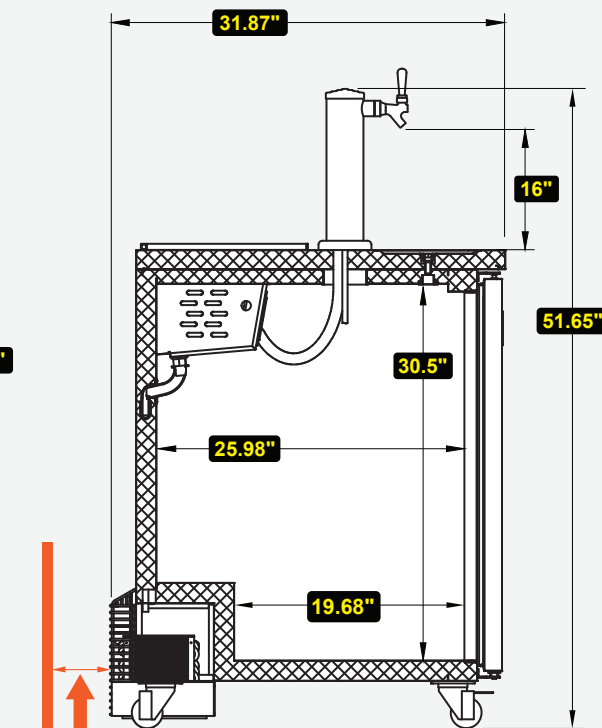

Side View

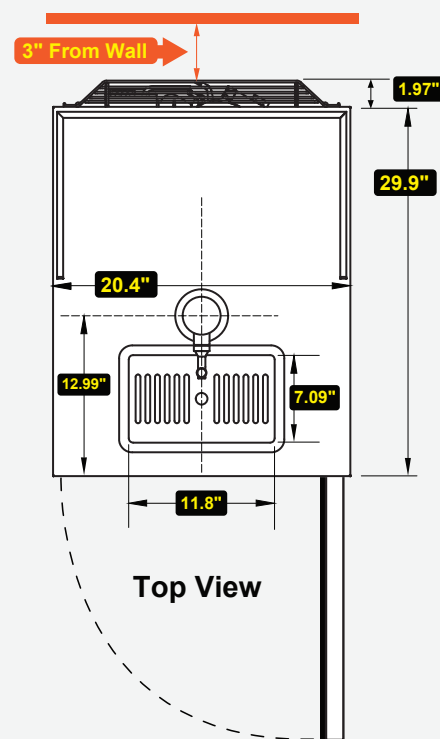

Top View



NEMA 5-15P

Technical Information:

MODEL #	DESCRIPTION	DIMENSIONS	WEIGHT/LBS.
		(W x D x H)	(Shipping)
DD24-1-HC	1 Tower, 1 Tap	24.1" W x 31.87" D x 39.5" H	185 lbs.

CONSTRUCTION



Exterior Material	Vinyl on Steel in Black
Interior Material	430 Stainless Steel
Insulation Material	CFC Free Foam
Shelf Material	PVC Coated Wire

COOLING



Temperature Range	33°F – 41°F
Refrigerant + Charge oz.	R600 / 2.88 oz.
BTU/H	740
Defrosting	Every 6 Hours
Horse Power	1/8
Storage Capacity	7.2 cubic feet

ELECTRICAL




Voltage	115
Amps	3
Hz	60
Phase	1

ADDITIONAL INFORMATION



Installation by certified commercial restaurant equipment installer recommended. Inspection before and after installation by licensed electrician for safe operation. Product designed for commercial interior usage in a climate controlled location with adequate air circulation and not adjacent to a high temperature source.



Copyright © 2021 Serv-Ware Products LLC.

Phone: (800).768.5953
Fax: (800).976.1299

www.servware.com